

Cyber-Dlog

Data storage




Product safety instructions

Dlog-1 is a data logging unit that can be connected to the solar charge controller to display and store the operating values. The display unit is simple in appearance and operation. The LCD screen displays system parameters and various fault alarm information in real time for monitoring the operation status of the a complete system.

- Thank you for choosing our data memory. Please read the instructions carefully before using the product.
- Please keep this product manual for future reference.
- When receiving the product, please check whether the goods are damaged during transportation. If any problem is found, please contact our company immediately.
- Please read all instructions and precautions in the manual before installation to ensure that the product can work properly.
- Do not place this product in the environment of rain, exposure, dust, vibration, corrosion and strong electromagnetic interference.
- Do not open the shell of this product for maintenance.

RS485 communication port of DLog-1 is connected to the solar controller

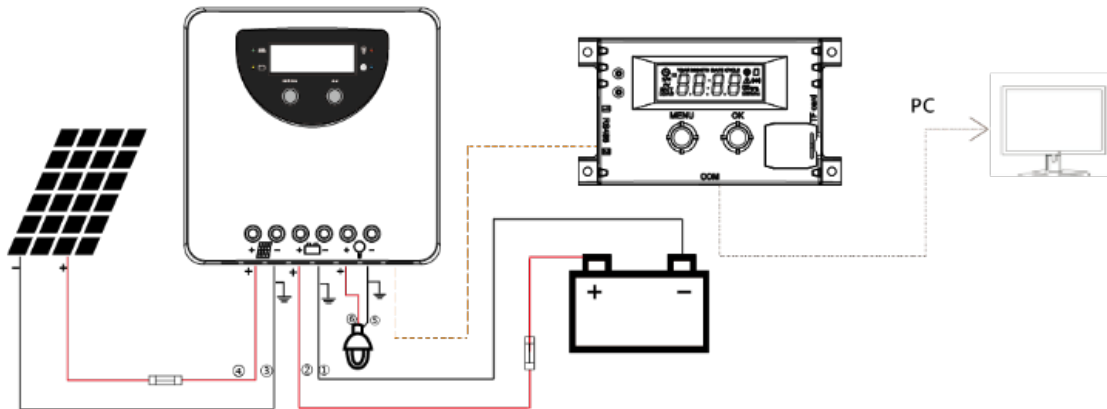

Technical Parameters

Item	Dlog-1
Applicable products	Lumiax solar controller and inverters with RS485 port
Input	5VDC (USB) (8 ~ 65V communication interface power supply)
LCD backlight	yes
Battery Model	Cr1220, not included
Working environment	-20°C ~ +65°C
Storage environment	-20°C ~ +80°C
Dimensions	112.5*63*23mm
Net weight	0.22kg